


# TUBIS BL

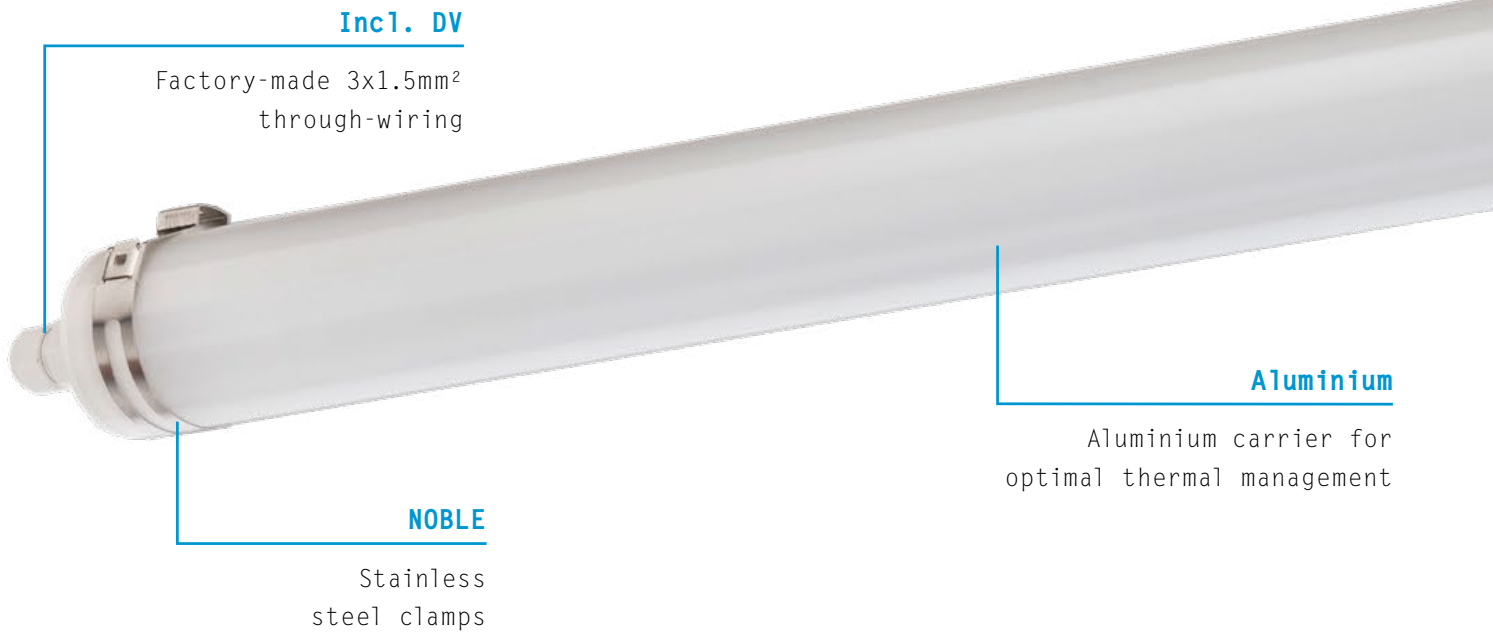

**CASING** PMMA-Blend round tube.

**END CAPS** Solid PBT end caps.

**SEALS** Extremely short, age-resistant silicone seals.

**ELECTRICAL COMPONENTS** High power LED, LED converter.

**ASSEMBLY** Variable mounting distances by PRACHT-CLIP-SYSTEM. Suitable for ceilings, wall, pendant and rail mounting.

**FIELDS OF APPLICATION** Washing plants, wet rooms, workshops, acid and alkaline cleaning plants and oily environments.

**Individual luminaire, colour temperature 4000 K, Ra>80, diameter 70mm**

Power	Light distribution	Luminous flux	Item number	Length	Weight
1x24 W	135° wide	2800 lm	5240004	1310 mm	1.8 kg
1x45 W	135° wide	5400 lm	5240014	1310 mm	1.8 kg
1x32 W	135° wide	3800 lm	5240005	1610 mm	2.2 kg
1x54 W	135° wide	6500 lm	5240015	1610 mm	2.2 kg

**Fast**

Solid PBT end caps,  
extremely fast connection

**Resistant**

High-quality PMMA-blend  
round tube (IK06, Ø70mm)

**Breathing**

No condensation thanks  
to climate membrane

# TUBULAR LUMINAIRE

**TIGHT ACID-ALKALI-RESISTANT  
UV RESISTANT  
STURDY FAST ASSEMBLY ENEC  
FOR UNPROTECTED OUTDOOR AREAS  
MODERN DESIGN**



**3**  
YEAR  
WARRANTY




**50.000 h**  
OPERATIONAL LIFETIME



**A++**



**INCL. DV**  
(3X1.5MM<sup>2</sup>)



**-20 °C ... +40 °C**