

DiMILANO100 | standard frame | round/squared | white/black optic



DiMILANO₁₀₀

Homage to Milan.

Larger dimensions characterise the series available in several variants to give a touch of personality and exclusive style to the lighting of rooms in residential or commercial contexts, such as shops and showrooms.



DiMILANO100


The assortment of optics with recessed sources, pinhole or narrowing, reflector or lens, allows a wide variety of lighting effects for comfortable illumination.




Trimless



Standard frame



Pinhole



LUMINAIRE

Die-cast aluminium body and trim; Polyester powder paint resistant to UV rays; Reflector made of engineering plastic metalized in high-vacuum or PMMA lenses; UV rays stabilized, 850°C glow wire test resistant, V0 self-extinguishing clear polycarbonate screen; High quality LED sources characterized according to IES TM-30, with high color consistency <3SDCM and long useful life >60000 hours at L80; It complies with standards EN 60598-1 and EN 60598-2-2.

INSTALLATION

Recessed installation; Steel spring clips.

Versions with Casambi and other modern control systems available, for more information see the "Light Control" section on page 468.

STANDARD PRODUCT

Color	Wiring	CCT
□ 11 (-11)	ON/OFF (A)	3000K (-930)

AVAILABLE OPTIONS


■ 12 (-12)	DALI (B), BLE (T)	4000K (-940), 2700 (-927)
------------	-------------------	---------------------------

RECESSED DOWNLIGHTS




DIMILANO100 | Trimless - White optic

Code	Optic	Watt	Lumen	CRI	CCT	Class	Wiring	A	B mm	C
0374021A-930-11	narrow 13°	12W	680lm	90	3000K	☐	ON/OFF	93	120	-
0374039A-930-11	medium 19°	15W	1050lm	90	3000K	☐	ON/OFF	93	150	-
0374036A-930-11	flood 34°	15W	1000lm	90	3000K	☐	ON/OFF	93	150	-




LIGHTING DATA

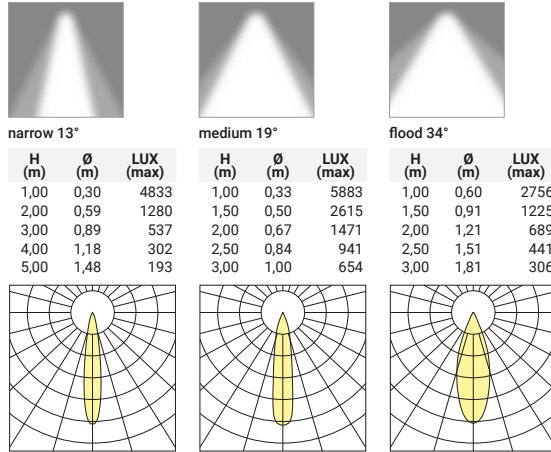

DIMILANO100 | Trimless - Black optic

Code	Optic	Watt	Lumen	CRI	CCT	Class	Wiring	A	B mm	C
0374023A-930-11	narrow 13°	12W	650lm	90	3000K	☐	ON/OFF	93	120	-
0374041A-930-11	medium 19°	15W	975lm	90	3000K	☐	ON/OFF	93	150	-
0374038A-930-11	flood 34°	15W	900lm	90	3000K	☐	ON/OFF	93	150	-

LIGHTING DATA

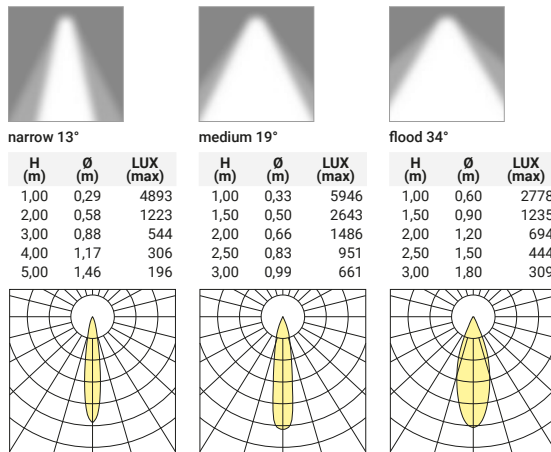



DIMILANO100 | Trimless - Chrome-plated optic

Code	Optic	Watt	Lumen	CRI	CCT	Class	Wiring	A	B mm	C
0374022A-930-11	narrow 13°	12W	700lm	90	3000K	☐	ON/OFF	93	120	-
0374040A-930-11	medium 16°	15W	1100lm	90	3000K	☐	ON/OFF	93	150	-

LIGHTING DATA





narrow 13°

H (m)	Ø (m)	LUX (max)
1,00	0,30	4955
2,00	0,60	1239
3,00	0,90	551
4,00	1,20	310
5,00	1,49	198




medium 16°

H (m)	Ø (m)	LUX (max)
1,00	0,29	8541
1,50	0,43	3796
2,00	0,58	2135
2,50	0,72	1367
3,00	0,86	949



DIMILANO100 | Standard frame - White optic

Code	Optic	Watt	Lumen	CRI	CCT	Class	Wiring	A	B mm	C
0374008A-930-11	narrow 13°	12W	680lm	90	3000K	☐	ON/OFF	115	120	-
0374030A-930-11	medium 19°	15W	1050lm	90	3000K	☐	ON/OFF	115	150	-
0374027A-930-11	flood 34°	15W	1000lm	90	3000K	☐	ON/OFF	115	150	-



LIGHTING DATA




narrow 13°

H (m)	Ø (m)	LUX (max)
1,00	0,30	4833
2,00	0,59	1280
3,00	0,89	537
4,00	1,18	302
5,00	1,48	193






medium 19°

H (m)	Ø (m)	LUX (max)
1,00	0,33	5883
1,50	0,50	2615
2,00	0,67	1471
2,50	0,84	941
3,00	1,00	654






flood 34°

H (m)	Ø (m)	LUX (max)
1,00	0,60	2756
1,50	0,91	1225
2,00	1,21	689
2,50	1,51	441
3,00	1,81	306



RECESSED DOWNLIGHTS


DIMILANO100 | Standard frame - Black optic

Code	Optic	Watt	Lumen	CRI	CCT	Class	Wiring	A	B mm	C
0374010A-930-11	 narrow 13°	12W	650lm	90	3000K	☐	ON/OFF	115	120	-
0374032A-930-11	 medium 19°	15W	975lm	90	3000K	☐	ON/OFF	115	150	-
0374029A-930-11	 flood 34°	15W	900lm	90	3000K	☐	ON/OFF	115	150	-

LIGHTING DATA




narrow 13°

H (m)	Ø (m)	LUX (max)
1,00	0,29	4893
2,00	0,58	1223
3,00	0,88	544
4,00	1,17	306
5,00	1,46	196






medium 19°



H (m)	Ø (m)	LUX (max)
1,00	0,33	5946
1,50	0,50	2643
2,00	0,66	1486
2,50	0,83	951
3,00	0,99	661



flood 34°

H (m)	Ø (m)	LUX (max)
1,00	0,60	2778
1,50	0,90	1235
2,00	1,20	694
2,50	1,50	444
3,00	1,80	309


DIMILANO100 | Standard frame - Chrome-plated optic

Code	Optic	Watt	Lumen	CRI	CCT	Class	Wiring	A	B mm	C
0374009A-930-11	 narrow 13°	12W	700lm	90	3000K	☐	ON/OFF	115	120	-
0374031A-930-11	 medium 16°	15W	1100lm	90	3000K	☐	ON/OFF	115	150	-

LIGHTING DATA





narrow 13°

H (m)	Ø (m)	LUX (max)
1,00	0,30	4955
2,00	0,60	1239
3,00	0,90	551
4,00	1,20	310
5,00	1,49	198





medium 16°

H (m)	Ø (m)	LUX (max)
1,00	0,29	8541
1,50	0,43	3796
2,00	0,58	2135
2,50	0,72	1367
3,00	0,86	949





DIMILANO100 | Trimless - Adjustable - Black optic

Code	Optic	Watt	Lumen	CRI	CCT	Class	Wiring	A	B mm	C
0374026A-930-11	 narrow 13°	12W	650lm	90	3000K	☐	ON/OFF	93	141	-
0374020A-930-11	 medium 25°	12W	570lm	90	3000K	☐	ON/OFF	93	141	-

LIGHTING DATA





narrow 13°

H (m)	Ø (m)	LUX (max)
1,00	0,29	4893
2,00	0,58	1223
3,00	0,88	544
4,00	1,17	306
5,00	1,46	196





medium 25°

H (m)	Ø (m)	LUX (max)
1,00	0,39	2626
1,50	0,58	1167
2,00	0,77	657
2,50	0,96	420
3,00	1,16	292



DIMILANO100 | Standard frame - Adjustable - Black optic

Code	Optic	Watt	Lumen	CRI	CCT	Class	Wiring	A	B mm	C
0374013A-930-11	 narrow 13°	12W	650lm	90	3000K	☐	ON/OFF	115	141	-
0374007A-930-11	 medium 25°	12W	550lm	90	3000K	☐	ON/OFF	115	141	-

LIGHTING DATA





narrow 13°

H (m)	Ø (m)	LUX (max)
1,00	0,29	4893
2,00	0,58	1223
3,00	0,88	544
4,00	1,17	306
5,00	1,46	196




medium 25°

H (m)	Ø (m)	LUX (max)
1,00	0,39	2626
1,50	0,58	1167
2,00	0,77	657
2,50	0,96	420
3,00	1,16	292



RECESSED DOWNLIGHTS



DIMILANO100 | Symmetric pinhole




Code	Optic	Watt	Lumen	CRI	CCT	Class	Wiring	A	B mm	C
0374006A-930-11	flood 37°	15W	275lm	90	3000K	□	ON/OFF	115	126	-

LIGHTING DATA




medium 20°

H (m)	Ø (m)	LUX (max)
1,00	0,66	704
1,50	0,99	313
2,00	1,32	176
2,50	1,65	113
3,00	1,98	78




DIMILANO100 | Asymmetric pinhole

Code	Optic	Watt	Lumen	CRI	CCT	Class	Wiring	A	B mm	C
0374012A-930-11	asymmetric lmax=21°	15W	275lm	90	3000K	□	ON/OFF	115	111	-



ACCESSORIES

1099249X	Kit to enhance the IP rating from IP43 to IP54. To be ordered together with the luminaire.	0,01Kg
1099040X	Polycarbonate lens for elliptic beam.	0,01Kg



1099248X




1099040X



DIMILANO100 | Trimless - White optic

Code	Optic	Watt	Lumen	CRI	CCT	Class	Wiring	A	B mm	C
0383021A-930-11	narrow 13°	12W	680lm	90	3000K	☐	ON/OFF	95	120	-
0383038A-930-11	medium 19°	15W	1050lm	90	3000K	☐	ON/OFF	95	146	-
0383036A-930-11	flood 36°	15W	1000lm	90	3000K	☐	ON/OFF	95	146	-



LIGHTING DATA



narrow 13°

H (m)	Ø1 (m)	Ø2 (m)	LUX (max)
1,00	0,31	0,36	4072
2,00	0,63	0,72	1018
3,00	0,94	1,08	452
4,00	1,25	1,44	254
5,00	1,57	1,80	163






medium 19°

H (m)	Ø (m)	LUX (max)
1,00	0,33	5682
1,50	0,49	2525
2,00	0,66	1420
2,50	0,82	909
3,00	0,98	631



flood 36°

H (m)	Ø (m)	LUX (max)
1,00	0,65	2470
1,50	0,98	1098
2,00	1,31	618
2,50	1,63	395
3,00	1,96	274



DIMILANO100 | Trimless - Black optic

Code	Optic	Watt	Lumen	CRI	CCT	Class	Wiring	A	B mm	C
0383023A-930-11	narrow 13°	12W	650lm	90	3000K	☐	ON/OFF	95	120	-
0383040A-930-11	medium 19°	15W	1000lm	90	3000K	☐	ON/OFF	95	146	-
0383037A-930-11	flood 36°	15W	950lm	90	3000K	☐	ON/OFF	95	146	-

LIGHTING DATA




narrow 13°

H (m)	Ø1 (m)	Ø2 (m)	LUX (max)
1,00	0,31	0,36	3892
2,00	0,63	0,72	973
3,00	0,94	1,08	432
4,00	1,25	1,44	243
5,00	1,57	1,80	156






medium 19°

H (m)	Ø (m)	LUX (max)
1,00	0,33	5795
1,50	0,49	2576
2,00	0,66	1449
2,50	0,82	927
3,00	0,98	644



flood 36°

H (m)	Ø (m)	LUX (max)
1,00	0,65	2557
1,50	0,97	1136
2,00	1,29	639
2,50	1,61	409
3,00	1,94	284



RECESSED DOWNLIGHTS



DIMILANO100 | Trimless - Chrome-plated optic

Code	Optic	Watt	Lumen	CRI	CCT	Class	Wiring	A	B mm	C
0383022A-930-11	narrow 13°	12W	700lm	90	3000K	☐	ON/OFF	95	120	-
0383039A-930-11	medium 19°	15W	1100lm	90	3000K	☐	ON/OFF	95	146	-

LIGHTING DATA





narrow 13°

H (m)	Ø1 (m)	Ø2 (m)	LUX (max)
1,00	0,35	0,38	3829
2,00	0,69	0,76	957
3,00	1,04	1,14	425
4,00	1,38	1,53	239
5,00	1,73	1,91	153




medium 19°

H (m)	Ø (m)	LUX (max)
1,00	0,33	5682
1,50	0,49	2525
2,00	0,66	1420
2,50	0,82	909
3,00	0,98	631



DIMILANO100 | Standard frame - White optic

Code	Optic	Watt	Lumen	CRI	CCT	Class	Wiring	A	B mm	C
0383008A-930-11	narrow 13°	12W	680lm	90	3000K	☐	ON/OFF	115	118	-
0383030A-930-11	medium 19°	15W	1050lm	90	3000K	☐	ON/OFF	115	148	-
0383027A-930-11	flood 36°	15W	1000lm	90	3000K	☐	ON/OFF	115	148	-



LIGHTING DATA




narrow 13°

H (m)	Ø1 (m)	Ø2 (m)	LUX (max)
1,00	0,31	0,36	4072
2,00	0,63	0,72	1018
3,00	0,94	1,08	452
4,00	1,25	1,44	254
5,00	1,57	1,80	163






medium 19°

H (m)	Ø (m)	LUX (max)
1,00	0,33	5682
1,50	0,49	2525
2,00	0,66	1420
2,50	0,82	909
3,00	0,98	631






flood 36°

H (m)	Ø (m)	LUX (max)
1,00	0,65	2470
1,50	0,98	1098
2,00	1,31	618
2,50	1,63	395
3,00	1,96	274




DIMILANO100 | Standard frame - Black optic

Code	Optic	Watt	Lumen	CRI	CCT	Class	Wiring	A	B mm	C
0383010A-930-11	 narrow 13°	12W	650lm	90	3000K	☐	ON/OFF	115	118	-
0383032A-930-11	 medium 19°	15W	1000lm	90	3000K	☐	ON/OFF	115	148	-
0383029A-930-11	 flood 36°	15W	950lm	90	3000K	☐	ON/OFF	115	148	-

LIGHTING DATA



narrow 13°

H (m)	Ø1 (m)	Ø2 (m)	LUX (max)
1,00	0,31	0,36	3892
2,00	0,63	0,72	973
3,00	0,94	1,08	432
4,00	1,25	1,44	243
5,00	1,57	1,80	156






medium 19°



H (m)	Ø (m)	LUX (max)
1,00	0,33	5795
1,50	0,49	2576
2,00	0,66	1449
2,50	0,82	927
3,00	0,98	644



flood 36°

H (m)	Ø (m)	LUX (max)
1,00	0,65	2557
1,50	0,97	1136
2,00	1,29	639
2,50	1,61	409
3,00	1,94	284


DIMILANO100 | Standard frame - Chrome-plated optic

Code	Optic	Watt	Lumen	CRI	CCT	Class	Wiring	A	B mm	C
0383009A-930-11	 narrow 13°	12W	700lm	90	3000K	☐	ON/OFF	115	118	-
0383031A-930-11	 medium 19°	15W	1100lm	90	3000K	☐	ON/OFF	115	148	-

LIGHTING DATA





narrow 13°

H (m)	Ø1 (m)	Ø2 (m)	LUX (max)
1,00	0,35	0,38	3829
2,00	0,69	0,76	957
3,00	1,04	1,14	425
4,00	1,38	1,53	239
5,00	1,73	1,91	153



medium 19°

H (m)	Ø (m)	LUX (max)
1,00	0,33	5682
1,50	0,49	2525
2,00	0,66	1420
2,50	0,82	909
3,00	0,98	631







DIMILANO100 | Trimless - Adjustable - Black optic


Code	Optic	Watt	Lumen	CRI	CCT	Class	Wiring	A	B mm	C
0383026A-930-11	narrow 13°	12W	650lm	90	3000K	☐	ON/OFF	95	137	-
0383020A-930-11	medium 25°	12W	570lm	90	3000K	☐	ON/OFF	95	137	-

LIGHTING DATA





narrow 13°

H (m)	Ø1 (m)	Ø2 (m)	LUX (max)
1,00	0,31	0,36	4072
2,00	0,63	0,72	1018
3,00	0,94	1,08	452
4,00	1,25	1,44	254
5,00	1,57	1,80	163



medium 25°

H (m)	Ø1 (m)	Ø2 (m)	LUX (max)
1,00	0,39	0,47	2634
1,50	0,58	0,70	1171
2,00	0,77	0,94	659
2,50	0,96	1,17	421
3,00	1,16	1,41	293



DIMILANO100 | Standard frame - Adjustable - Black optic

Code	Optic	Watt	Lumen	CRI	CCT	Class	Wiring	A	B mm	C
0383013A-930-11	narrow 13°	12W	650lm	90	3000K	☐	ON/OFF	115	144	-
0383007A-930-11	medium 25°	12W	570lm	90	3000K	☐	ON/OFF	115	144	-

LIGHTING DATA





narrow 13°

H (m)	Ø1 (m)	Ø2 (m)	LUX (max)
1,00	0,31	0,36	4072
2,00	0,63	0,72	1018
3,00	0,94	1,08	452
4,00	1,25	1,44	254
5,00	1,57	1,80	163



medium 25°


H (m)	Ø1 (m)	Ø2 (m)	LUX (max)
1,00	0,39	0,47	2634
1,50	0,58	0,70	1171
2,00	0,77	0,94	659
2,50	0,96	1,17	421
3,00	1,16	1,41	293



RECESSED DOWNLIGHTS



DIMILANO100 | Symmetric pinhole



Code	Optic	Watt	Lumen	CRI	CCT	Class	Wiring	A	B mm	C
0383006A-930-11	 flood 36°	15W	250lm	90	3000K	□	ON/OFF	115	126	-

LIGHTING DATA




flood 36°

H (m)	Ø (m)	LUX (max)
1,00	0,59	675
1,50	0,88	300
2,00	1,18	169
2,50	1,47	108
3,00	1,77	75




DIMILANO100 | Asymmetric pinhole

Code	Optic	Watt	Lumen	CRI	CCT	Class	Wiring	A	B mm	C
0383012A-930-11	 asymmetric lmax=38°	14W	250lm	90	3000K	□	ON/OFF	115	111	-



ACCESSORIES

1099248X	Kit to enhance the IP rating from IP43 to IP54. To be ordered together with the luminaire.	0,01Kg
1099040X	Polycarbonate lens for elliptic beam.	0,01Kg



1099248X



1099040X