


Recessed wall-mounted luminaires

KAMPUS

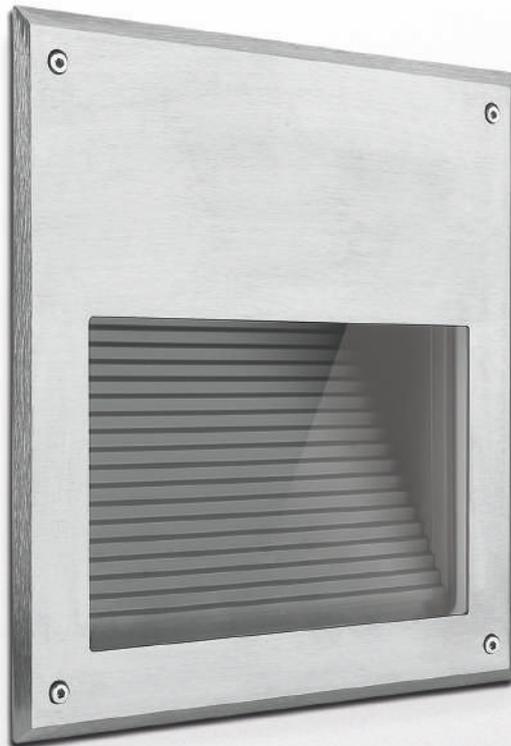

LUMINAIRE

- Shatterproof body made of fiber glass reinforced engineering plastic.
- Die-cast aluminium (EN 47100) or AISI 316L stainless steel trim.
- Double layer polyester powder paint resistant to corrosion and salt spray fog.
- Silicone rubber gaskets.
- AISI 316 stainless steel external screws.
- UV rays stabilized polycarbonate screen. 850°C glow wire test resistant, V0 self-extinguishing or in 3mm tempered glass.
- High quality LED sources characterized according to IES TM-30, with high color consistency <3SDCM and long useful life >60000 hours at L80.
- It complies with standards EN 60598-1 and EN 60598-2-2.

INSTALLATION

- Recessed installation.
- Double waterproof grommet for through wiring.
- Supplied with recessed installation box made of engineering plastic.

Available versions with Casambi and other modern control systems, for more information see "Light controls" section.

STANDARD PRODUCT		AVAILABLE OPTIONS	
Wiring	ON/OFF (A)		
CCT	3000K (-830)	4000K (-840)	
Colour	<input checked="" type="radio"/> 21, <input checked="" type="radio"/> 30	<input type="radio"/> 11, <input checked="" type="radio"/> 12	



Photorealistic rendering.

Recessed wall-mounted luminaires

KAMPUS

DIE-CAST ALUMINIUM TRIM


Supplied with recessed installation box made of engineering plastic (1099228X).



STANDARD COLOUR

 21


DIMENSIONS



Code	Optic	Luminaire		CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
		Watt	Lumen								
0571003A-830-21	 asymmetric I _{max} =40°	7W	250lm	80	3000K	⊕	ON/OFF	220-240V 50/60Hz	250	246	116

 The **photo** represents the family product range. You can see the correct image of each product (code) on the website.

STAINLESS STEEL TRIM


Supplied with recessed installation box made of engineering plastic (1099228X).



STANDARD COLOUR

 30


DIMENSIONS



Code	Optic	Luminaire		CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
		Watt	Lumen								
0571004A-830-30	 asymmetric I _{max} =40°	7W	250lm	80	3000K	⊕	ON/OFF	220-240V 50/60Hz	250	246	116

 The **photo** represents the family product range. You can see the correct image of each product (code) on the website.

LED driver included.


ACCESSORIES

It is possible to purchase the recessed box separately, whenever it is necessary to start the installation in advance. The item can be ordered later on and it will be supplied complete with recessed box (to be removed if purchased separately in advance).



Code	Kg
1099228X	0,32

Thermoplastic material recessed installation box.

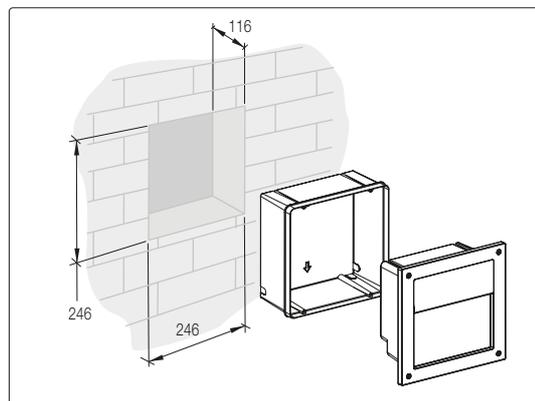



Photorealistic rendering.