


Facade fittings

# KRION

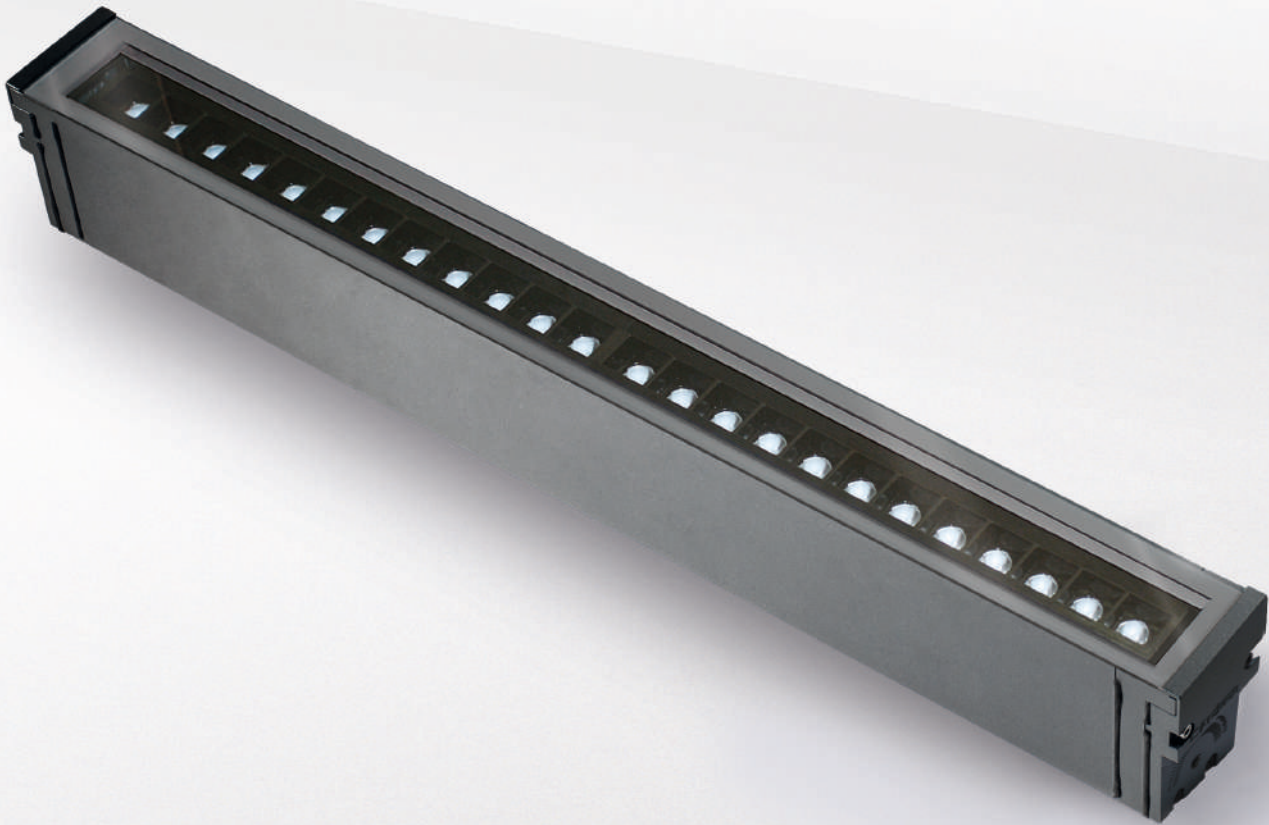

### LUMINAIRE

- Extruded aluminium body.
- Die-cast aluminium end caps (EN 47100).
- Double layer polyester powder paint resistant to corrosion and salt spray fog.
- Silicone rubber gaskets.
- AISI 316 stainless steel external screws.
- PMMA lenses for LEDs.
- Screen made of 8mm thermal-shock resistant tempered glass.
- Goniometer scale to aim light.
- High quality LED sources characterized according to IES TM-30, with high color consistency <3SDCM and long useful life >60000 hours at L80.
- It complies with standards EN 60598-1 and EN 60598-2-5.

### INSTALLATION

- Galvanized and painted steel bracket.
- Double cable gland M20 for through wiring.
- Aiming possibility.

These fittings are suitable for the modern control systems. For the various possibilities, please see section "Controlling the light".

**Support brackets to be ordered separately.**

STANDARD PRODUCT		AVAILABLE OPTIONS	
Wiring	ON/OFF (A), DMX/RDM (F)	DALI (B)	
CCT	4000K (-840), RGBW	3000K (-830)	
Colour	<input type="radio"/> 21	<input type="radio"/> 16	



📍 House of Music and Music Theatre (MUMUTH) - Graz, Austria (@ www.wolfganghummer.com)

Facade fittings

# KRION



## PERFORMANCE









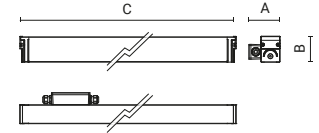








### STANDARD COLOUR



### DIMENSIONS



Code	Optic	Luminaire		CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
		Watt	Lumen								
0485018A-840-21	 narrow 12°	15W	1500lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	108	88	346
0485019A-840-21	 narrow 12°	28W	3050lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	108	88	639
0485020A-840-21	 narrow 12°	56W	6200lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	108	88	1225
0485021A-840-21	 flood 26°	15W	1500lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	108	88	346
0485022A-840-21	 flood 26°	28W	3050lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	108	88	639
0485023A-840-21	 flood 26°	56W	6200lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	108	88	1225
0485024A-840-21	 wide flood 47°	15W	1350lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	108	88	346
0485025A-840-21	 wide flood 47°	28W	2700lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	108	88	639
0485026A-840-21	 wide flood 47°	56W	5500lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	108	88	1225
0485027A-840-21	 elliptic 10°x55°	15W	1400lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	108	88	346
0485028A-840-21	 elliptic 10°x55°	28W	2800lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	108	88	639
0485029A-840-21	 elliptic 10°x55°	56W	5700lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	108	88	1225
0485030A-840-21	 wall washer lmax=18°	15W	1450lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	108	88	346
0485031A-840-21	 wall washer lmax=18°	28W	2950lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	108	88	639
0485032A-840-21	 wall washer lmax=18°	56W	5950lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	108	88	1225

The **photo** represents the family product range. You can see the correct image of each product (code) on the website.

**LED driver included.**

# KRION



## PERFORMANCE +





















### STANDARD COLOUR



### DIMENSIONS



Code	Optic	Luminaire		CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
		Watt	Lumen								
0485000A-840-21	 medium 18°	20W	1900lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	108	88	346
0485001A-840-21	 medium 18°	39W	3800lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	108	88	639
0485002A-840-21	 medium 18°	81W	7600lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	108	88	1225
0485003A-840-21	 flood 28°	20W	1900lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	108	88	346
0485004A-840-21	 flood 28°	39W	3900lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	108	88	639
0485005A-840-21	 flood 28°	81W	7700lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	108	88	1225
0485006A-840-21	 wide flood 42°	20W	2050lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	108	88	346
0485007A-840-21	 wide flood 42°	39W	4050lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	108	88	639
0485008A-840-21	 wide flood 42°	81W	8050lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	108	88	1225
0485009A-840-21	 very-wide flood 72°	20W	1450lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	108	88	346
0485010A-840-21	 very-wide flood 72°	39W	2950lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	108	88	639
0485011A-840-21	 very-wide flood 72°	81W	5850lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	108	88	1225
0485012A-840-21	 elliptic 16°x35°	20W	2100lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	108	88	346
0485013A-840-21	 elliptic 16°x35°	39W	4150lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	108	88	639
0485014A-840-21	 elliptic 16°x35°	81W	8300lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	108	88	1225
0485015A-840-21	 wall washer lmax=18°	20W	2050lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	108	88	346
0485016A-840-21	 wall washer lmax=18°	39W	4050lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	108	88	639
0485017A-840-21	 wall washer lmax=18°	81W	8050lm	80	4000K	⊕	ON/OFF	220-240V 50/60Hz	108	88	1225

The photo represents the family product range. You can see the correct image of each product (code) on the website.

LED driver included.

Facade fittings

# KRION



## PERFORMANCE + RGBW



STANDARD COLOUR



DIMENSIONS



Code	Optic	Luminaire Watt	Lumen	CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
0485033F-21	medium 18°	31W			RGBW	⊕	DMX	220-240V 50/60Hz	108	88	639
0485034F-21	medium 18°	52W			RGBW	⊕	DMX	220-240V 50/60Hz	108	88	1225
0485035F-21	flood 28°	31W			RGBW	⊕	DMX	220-240V 50/60Hz	108	88	639
0485036F-21	flood 28°	52W			RGBW	⊕	DMX	220-240V 50/60Hz	108	88	1225
0485037F-21	wide flood 42°	31W			RGBW	⊕	DMX	220-240V 50/60Hz	108	88	639
0485038F-21	wide flood 42°	52W			RGBW	⊕	DMX	220-240V 50/60Hz	108	88	1225
0485039F-21	very-wide flood 72°	31W			RGBW	⊕	DMX	220-240V 50/60Hz	108	88	639
0485040F-21	very-wide flood 72°	52W			RGBW	⊕	DMX	220-240V 50/60Hz	108	88	1225
0485041F-21	elliptic 16°x35°	31W			RGBW	⊕	DMX	220-240V 50/60Hz	108	88	639
0485042F-21	elliptic 16°x35°	52W			RGBW	⊕	DMX	220-240V 50/60Hz	108	88	1225
0485043F-21	wall washer lmax=18°	31W			RGBW	⊕	DMX	220-240V 50/60Hz	108	88	639
0485044F-21	wall washer lmax=18°	52W			RGBW	⊕	DMX	220-240V 50/60Hz	108	88	1225

The photo represents the family product range. You can see the correct image of each product (code) on the website.


LED driver included.



These fittings are suitable for the modern control systems. For the various possibilities, please see section "Controlling the light".


# KRION

## ACCESSORIES




Code	Kg
<b>1099370X-21</b>	0,50

Powder coated orientable brackets in steel.

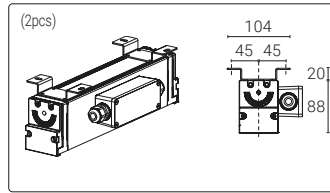


Code	Kg
<b>1099371X-21</b>	0,70

Powder coated non-orientable brackets in steel.



Code	Kg
<b>1099372X-21</b>	0,70

Powder coated orientable and extendable brackets in steel.



Code	Kg
<b>1099373X-21</b>	0,60

Cantilever brackets made of powder coated steel.



📍 Norwegian Coastal Express Museum (Hurtigrutemuseet) - Stokmarknes, Norway