

Bollards

KUBIX180



LUMINAIRE



- Die-cast aluminium body (EN 47100).
- Extruded aluminium pole.
- Double layer polyester powder paint resistant to corrosion and salt spray fog.
- Silicone rubber gaskets.
- AISI 316 stainless steel external screws.
- PMMA lenses for LEDs.
- Screen made of 5mm thermal-shock resistant tempered glass.
- High quality LED sources characterized according to IES TM-30, with high color consistency <3SDCM and long useful life >60000 hours at L80.
- It complies with standards EN 60598-1 and EN 60598-2-1.

INSTALLATION


- Bollard installation.
- Die-cast aluminium base (EN 47100) for ground anchoring for rawlplugs.
- Supplied with power cable.

These fittings are suitable for the modern control systems. For the various possibilities, please see section "Controlling the light".

Different accessories to be ordered separately.

STANDARD PRODUCT		AVAILABLE OPTIONS	
Wiring	ON/OFF (A)	DALI (B), REM-D (C)	
CCT	4000K (-840)	3000K (-830)	
Colour	 16	 21	



 Dubai Municipality - Dubai, EAU

Bollards


KUBIX180

TWOWAY






STANDARD COLOUR

● 16



DIMENSIONS



Code	Optic	Luminaire		CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
		Watt	Lumen								
0866014A-840-16	 two way	18W	700lm	80	4000K	☐	ON/OFF	220-240V 50/60Hz	180	500	-
0866013A-840-16	 two way	19W	700lm	80	4000K	☐	ON/OFF	220-240V 50/60Hz	180	1000	-


 The **photo** represents the family product range. You can see the correct image of each product (code) on the website.

THREEWAY






STANDARD COLOUR

● 16




DIMENSIONS



Code	Optic	Luminaire		CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
		Watt	Lumen								
0866016A-840-16	 three way	28W	1100lm	80	4000K	☐	ON/OFF	220-240V 50/60Hz	180	500	-
0866015A-840-16	 three way	28W	1100lm	80	4000K	☐	ON/OFF	220-240V 50/60Hz	180	1000	-

 The **photo** represents the family product range. You can see the correct image of each product (code) on the website.

LED driver included.
 **Available on request:** versions with Smart Function see pag. 310.

 **Available on request:** emergency versions.

KUBIX180



RADIAL






STANDARD COLOUR

● 16


DIMENSIONS



Code	Optic	Luminaire		CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
		Watt	Lumen								
0866018A-840-16	 radial	36W	1650lm	80	4000K	☐	ON/OFF	220-240V 50/60Hz	180	500	-
0866017A-840-16	 radial	36W	1650lm	80	4000K	☐	ON/OFF	220-240V 50/60Hz	180	1000	-
VERSION 24Vdc											
0866019C-840-16	 radial	33W	1650lm	80	4000K	◇	REM-D		180	1000	-


The **photo** represents the family product range. You can see the correct image of each product (code) on the website.

ACCESSORIES

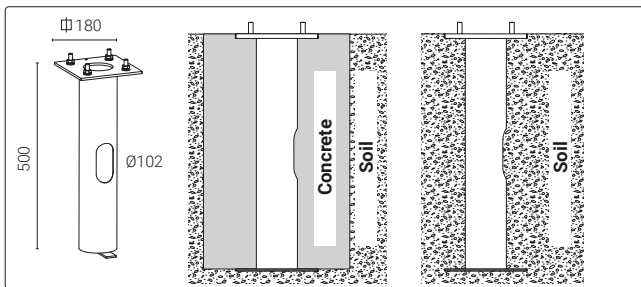

Code	Kg
1099093X	6,60

Zinc-coated steel pillar.




Code	Kg
1099402X-16	1,40

Galvanized and painted steel base plate with galvanized steel stud bolts.



Code	Kg
1099408X	0,03

IP68 linear joint - 2 ways - 2 poles.



Code	Kg
1099259X	0,05

Junction box IP68 - 4 ways - 2/3 poles



Code	Kg
1099407X	0,03


Junction box IP68 - 4 ways - 4/5 poles.



Code	Kg
1099410X	0,03

IP68 linear joint - 2 ways - 4 poles.

LED driver included.

 **Available on request:** versions with Smart Function see pag. 310.

 **Available on request:** emergency versions.