

Ceiling luminaires

## **MOTO<sup>3</sup>**



### LUMINAIRE





- Die-cast aluminium body (EN 47100).
- Die-cast aluminium control gear box (EN 47100).
- Cover made of powder coated sheet steel.
- Double layer polyester powder paint resistant to corrosion and salt spray fog.
- Silicone rubber gaskets.
- AISI 316 stainless steel external screws.
- Driver protected against voltage surges up to 4kV.
- Reflector made of engineering plastic metalized in high-vacuum.
- UV rays stabilized, 850°C glow wire test resistant, V0 self-extinguishing clear polycarbonate screen.
- High quality LED sources characterized according to IES TM-30, with high color consistency <3SDCM and long useful life >60000 hours at L80.
- It complies with standards EN 60598-1 and EN 60598-2-1.

### INSTALLATION

- Ceiling installation.
- Tecnopolymer M20 cable gland.

Available versions with Casambi and other modern control systems, for more information see "Light controls" section.

Available upon request die-cast trim and flush glass version.

STANDARD PRODUCT		AVAILABLE OPTIONS	
Wiring	ON/OFF (A)	DALI (B)	
CCT	4000K (-840)	3000K (-830)	
Colour	 21	 11,  12,  16	




Ceiling luminaires

# MOTO<sup>3</sup>


1 MODULE








STANDARD COLOUR




DIMENSIONS



Code	Optic	Luminaire	CCT	CRI	Class	Wiring	Power Supply	A mm	B mm	C mm
0253005A-840-21	 narrow 12°	54W, 6150lm	4000K	80	⊕	ON/OFF	220-240V 50/60Hz	198	230	198
0253003A-840-21	 flood 37°	54W, 5400lm	4000K	80	⊕	ON/OFF	220-240V 50/60Hz	198	230	198
0253007A-840-21	 very-wide flood 66°	54W, 5100lm	4000K	80	⊕	ON/OFF	220-240V 50/60Hz	198	230	198
0253009A-840-21	 ultra wide flood 99°	54W, 6400lm	4000K	80	⊕	ON/OFF	220-240V 50/60Hz	198	230	198
0253015A-840-21	 asymmetric lmax=45°	54W, 6000lm	4000K	80	⊕	ON/OFF	220-240V 50/60Hz	198	230	198

The **photo** represents the family product range. You can see the correct image of each product (code) on the website.

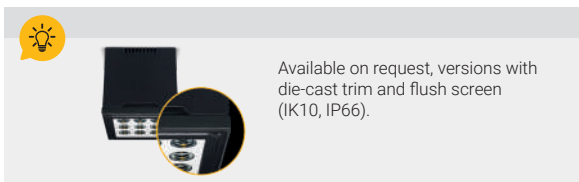

LED driver included.


# MOTO<sup>3</sup>

2 MODULES




STANDARD COLOUR

● 21




DIMENSIONS

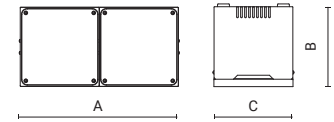

Code	Optic	Luminaire	CCT	CRI	Class	Wiring	Power Supply	A mm	B mm	C mm
0253006A-840-21	 narrow 12°	108W, 12300lm	4000K	80	⊕	ON/OFF	220-240V 50/60Hz	348	230	198
0253004A-840-21	 flood 37°	108W, 10800lm	4000K	80	⊕	ON/OFF	220-240V 50/60Hz	348	230	198
0253008A-840-21	 very-wide flood 66°	108W, 10200lm	4000K	80	⊕	ON/OFF	220-240V 50/60Hz	348	230	198
0253010A-840-21	 ultra wide flood 99°	108W, 12800lm	4000K	80	⊕	ON/OFF	220-240V 50/60Hz	348	230	198
0253017A-840-21	 asymmetric I <sub>max</sub> =45°	108W, 12000lm	4000K	80	⊕	ON/OFF	220-240V 50/60Hz	348	230	198

The **photo** represents the family product range. You can see the correct image of each product (code) on the website.

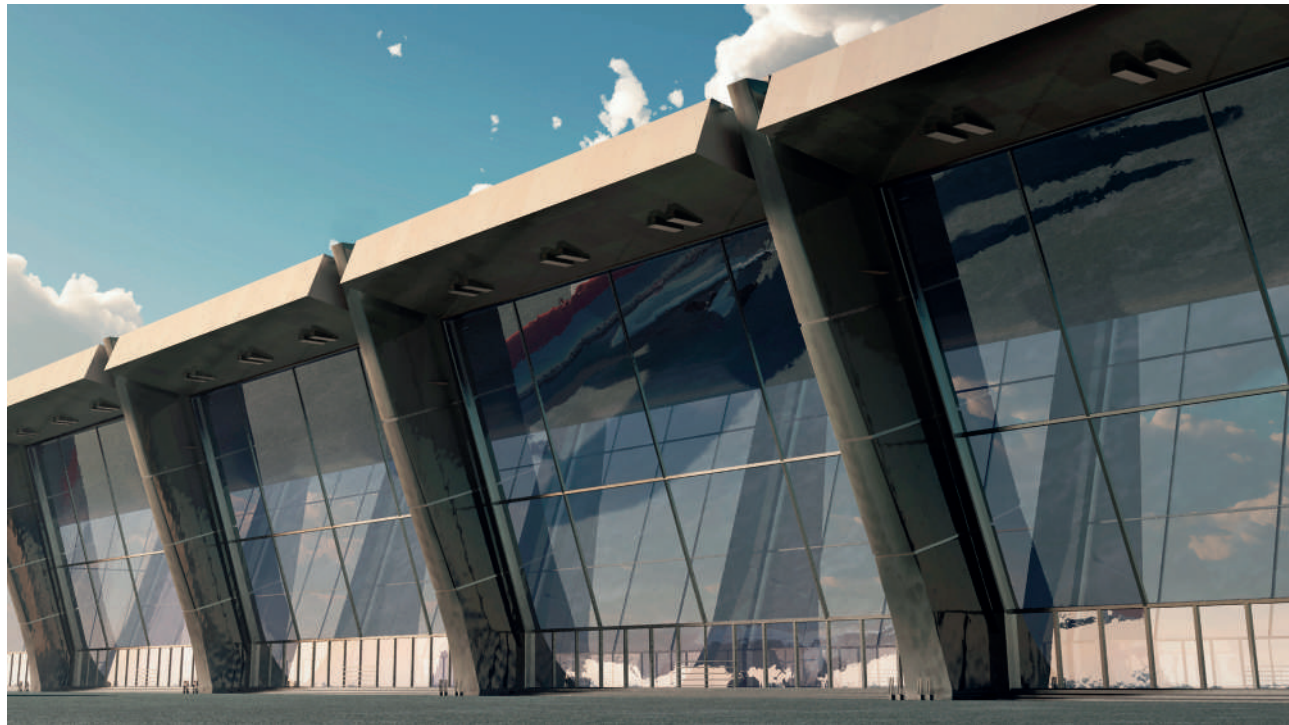

LED driver included.