

Ceiling luminaires

PIXOL110/150/200

NEW



LUMINAIRE

- Die-cast aluminium body and trim (EN 47100).
- Double layer polyester powder paint resistant to corrosion and salt spray fog.
- Silicone rubber gaskets.
- AISI 316 stainless steel external screws.
- Reflector made of engineering plastic metalized in high-vacuum or PMMA lenses.
- Screen made of 5mm thermal-shock resistant tempered glass.
- High quality LED sources characterized according to IES TM-30, with high color consistency <3SDCM and long useful life >60000 hours at L80.
- It complies with standards EN 60598-1 and EN 60598-2-1.

INSTALLATION

- Ceiling installation.
- Waterproof grommet for single cable entry.

Available versions with Casambi and other modern control systems, for more information see "Light controls" section.

PIXOL is part of a series of coordinated products which includes: ceiling luminaires, facade fittings, bollards and outdoor floodlights.

STANDARD PRODUCT		AVAILABLE OPTIONS	
Wiring	ON/OFF (A)	DALI (B)	
CCT	3000K (-830)	4000K (-840)	
Colour	<input checked="" type="radio"/> 21	<input type="radio"/> 11, <input type="radio"/> 16	



Photorealistic rendering.

Ceiling luminaires

PIXOL110


PIXOL110 - PERFORMANCE









STANDARD COLOUR


 21


DIMENSIONS



Code	Optic	Luminaire		CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
		Watt	Lumen								
0254011A-830-21	 narrow 15°	14W	1600lm	80	3000K	⊕	ON/OFF	220-240V 50/60Hz	110	110	110
0254012A-830-21	 flood 26°	14W	1650lm	80	3000K	⊕	ON/OFF	220-240V 50/60Hz	110	110	110
0254013A-830-21	 wide flood 41°	14W	1600lm	80	3000K	⊕	ON/OFF	220-240V 50/60Hz	110	110	110
0254014A-830-21	 very-wide flood 58°	14W	1600lm	80	3000K	⊕	ON/OFF	220-240V 50/60Hz	110	110	110
0254005A-830-21	 elliptic 49°x26°	14W	1300lm	80	3000K	⊕	ON/OFF	220-240V 50/60Hz	110	110	110
0254006A-830-21	 wall washer lmax=18°	14W	1000lm	80	3000K	⊕	ON/OFF	220-240V 50/60Hz	110	110	110

The **photo** represents the family product range. You can see the correct image of each product (code) on the website.

LED driver included.



Photorealistic rendering.

Ceiling luminaires

PIXOL150


PIXOL150 - PERFORMANCE









STANDARD COLOUR


 21


DIMENSIONS



Code	Optic	Luminaire		CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
		Watt	Lumen								
0255011A-830-21	 narrow 15°	31W	3100lm	80	3000K	⊕	ON/OFF	220-240V 50/60Hz	150	150	110
0255012A-830-21	 flood 26°	31W	3100lm	80	3000K	⊕	ON/OFF	220-240V 50/60Hz	150	150	110
0255013A-830-21	 wide flood 41°	31W	3100lm	80	3000K	⊕	ON/OFF	220-240V 50/60Hz	150	150	110
0255014A-830-21	 very-wide flood 58°	31W	3050lm	80	3000K	⊕	ON/OFF	220-240V 50/60Hz	150	150	110
0255005A-830-21	 elliptic 45°x26°	31W	2750lm	80	3000K	⊕	ON/OFF	220-240V 50/60Hz	150	150	110
0255006A-830-21	 wall washer lmax=18°	31W	2350lm	80	3000K	⊕	ON/OFF	220-240V 50/60Hz	150	150	110

The **photo** represents the family product range. You can see the correct image of each product (code) on the website.

LED driver included.



Photorealistic rendering.

Ceiling luminaires

PIXOL200


PIXOL200 - PERFORMANCE







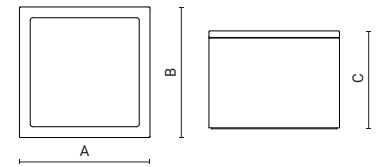

STANDARD COLOUR


 21


DIMENSIONS



Code	Optic	Luminaire		CRI	CCT	Class	Wiring	Power Supply	A mm	B mm	C mm
		Watt	Lumen								
0256000A-830-21	 spot 10°	38W	4400lm	80	3000K	⊕	ON/OFF	220-240V 50/60Hz	200	200	150
0256010A-830-21	 narrow 15°	69W	8000lm	80	3000K	⊕	ON/OFF	220-240V 50/60Hz	200	200	150
0256001A-830-21	 flood 37°	38W	3900lm	80	3000K	⊕	ON/OFF	220-240V 50/60Hz	200	200	150
0256011A-830-21	 flood 40°	69W	7150lm	80	3000K	⊕	ON/OFF	220-240V 50/60Hz	200	200	150
0256003A-830-21	 very-wide flood 70°	38W	4300lm	80	3000K	⊕	ON/OFF	220-240V 50/60Hz	200	200	150
0256013A-830-21	 very-wide flood 70°	69W	8000lm	80	3000K	⊕	ON/OFF	220-240V 50/60Hz	200	200	150

The **photo** represents the family product range. You can see the correct image of each product (code) on the website.



Photorealistic rendering.