

CR24™

595mm x 1195mm Architectural LED Troffer




Product Description

The CR24™ architectural LED troffer delivers up to 5000 lumens of exceptional 90+ CRI light while achieving 90-110 lumens per watt. This breakthrough performance is achieved by combining the high efficacy and high-quality light of Cree TrueWhite® Technology with a unique thermal management approach. The CR24 is available in warm or cool color temperatures and has both 1-10V and DALI dimming options.

Its compact, lightweight design easily accommodates recessed, surface mount, or suspended installations, making the CR24 perfect for use in commercial new construction or retrofit applications.

Performance Summary

Utilizes Cree TrueWhite® Technology
Active Color Management
Room-Side Heat Sink
Efficacy: 90-110 L/W
Delivered Light Output: 2200, 4000, 5000 lumens
Input Power: 22-50 watts
CRI: 90
Input Voltage: 3000K, 4000K
Tensione di ingresso: 220-240 VAC
Warranty: 10 anni
Lifetime: Designed to last 50,000 hours standard or 75,000 hours with HE option
Dimming: 1-10V or DALI Dimming to 5%†
Mounting: Recessed
Dimensions: L 1195mm x W 595mm x H 120mm
Weight: max 10Kg

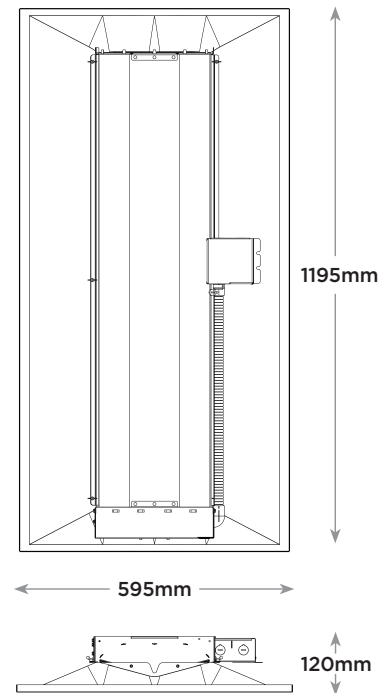

Ordering Information (Limited Inventory - consult factory for availability)					
Example: CR24-40L-40K-23					
CR24					
Product	Lumen Output	Color Temperature	Control	Voltage	Options
CR24	22L 22W 2200 lumens - 100 L/W 40L 44W 4000 lumens - 90 L/W 40L HE* 36W 4000 lumens - 110 L/W (30 K) 38W 4000 lumens - 105 L/W (40 K) 50L* 50W 5000 lumens - 100 L/W	30K 3000 Kelvin 40K 4000 Kelvin	No code Non-dimming ADIM 1-10V Dimming to 5% DALI** DALI Dimming to 5%	23 220-240V (Standard)	No code CE/CB certified

* 3000K HE model is 36W (110 LPW), 4000K HE model is 38W (105 LPW)

** Not available for codes CR24-22L

† Reference CreeLighting.com/International for recommended dimming control options

Product Specifications

CREE TRUEWHITE® TECHNOLOGY

A revolutionary way to generate high-quality white light, Cree TrueWhite® Technology mixes the light from the highest performing red and unsaturated yellow LEDs. This patented design creates a pleasing architectural aesthetic while conducting heat away from LEDs in a temperature controlled environment. This enables the LEDs to consistently run cooler, providing significant boosts to lifetime, efficacy, and color consistency, all while maintaining high luminous efficacy—a true no compromise solution.

ROOM-SIDE HEAT SINK

An innovative thermal management system designed to maximize cooling effectiveness by integrating a unique room-side heat sink into the diffusing lens. This breakthrough design creates a pleasing architectural aesthetic while conducting heat away from LEDs in a temperature controlled environment. This enables the LEDs to consistently run cooler, providing significant boosts to lifetime, efficacy, and color consistency.

LUMEN MAINTENANCE FACTORS

- Reference CreeLighting.com/International for detailed lumen maintenance factors

CONSTRUCTION & MATERIALS

- Durable 20-gauge steel housing with standard troffer access plate for electrical installation.
- Field replaceable light engine integrates LEDs, driver, power supply, thermal management, and optical mixing components.
- One-piece lower reflector finished with a textured high reflectance white polyester powder coating creates a comfortable visual transition from the lens to the ceiling plane
- Provided t-bar clips and holes for mounting support wires enable recessed or suspended installation
- Individual fixtures may be mounted end to end for a continuous row of illumination

NOTE: Reference CreeLighting.com/International for detailed instructions on field replacement of the light engine

OPTICAL SYSTEM

- Unique combination of reflective and refractive optical components achieves a uniform, comfortable appearance while eliminating pixelation and color fringing
- Components work together to optimize distribution, balancing the delivery of high illuminance levels on horizontal surfaces with an ideal amount of light on walls and vertical surfaces. This increases the perception of spaciousness
- Diffusing lens integrated with upward-facing LED strip eliminates direct view of LEDs while lower reflector balances brightness of lens with the ceiling to create a low-glare high angle appearance
- UGR < 16/19 Reflection factors 0,2/0,5/0,7

ELECTRICAL SYSTEM

- Integral, high-efficiency driver and power supply
- Power Factor = 0.9 nominal
- Input Power: Stays constant over life
- Input Voltage: 220-240V, 50/60Hz
- Dimming: Dimmable to 5% with Analog 1-10V or DALI control protocols. Reference CreeLighting.com/International for recommended dimming controls
- Temperature Rating: Designed to operate in temperatures 35 C and below room side and plenum side
- Total Harmonic Distortion: < 20%

REGULATORY & VOLUNTARY QUALIFICATIONS

- CE certified
- IP23


© 2016 Cree, Inc. and/or one of its subsidiaries. All rights reserved. For informational purposes only. Content is subject to change. Patent www.cree.com/patents. Cree®, the Cree logo, Cree TrueWhite®, and the Cree TrueWhite Technology logo are registered trademarks, and CR24™ is a trademark of Cree, Inc.

Rev. Date: 21 October 2016

Photometry

CR14-4000L BASED ON LTL REPORT TEST #: 24294

Fixture photometry has been conducted by a NVLAP accredited testing laboratory in accordance with IESNA LM-79-08. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%.

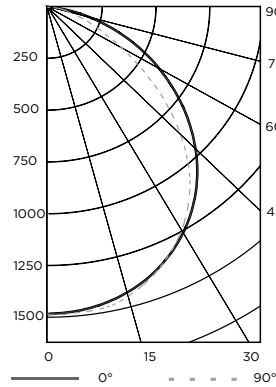

Average Luminance Table (cd/m ²)				
Vertical Angle	Horizontal Angle			
	0°	45°	90°	
0°	2174	2174	2174	
45°	1976	2116	2152	
55°	1807	2018	2074	
65°	1553	1889	1879	
75°	1149	1501	1119	
85°	424	62	62	

Coefficients of Utilization				
RCC %:	80			
RW %:	70	50	30	0
RCR: 0	1,19	1,19	1,19	1,19
1	1,09	1,05	1,01	0,97
2	1	0,92	0,85	0,79
3	0,91	0,8	0,72	0,66
4	0,83	0,71	0,63	0,56
5	0,76	0,64	0,55	0,48
6	0,71	0,57	0,48	0,42
7	0,65	0,52	0,43	0,37
8	0,61	0,47	0,39	0,33
9	0,57	0,43	0,35	0,3
10	0,53	0,4	0,32	0,27

Effective Floor Cavity Reflectance: 20%

Zonal Lumen Summary			
Zone	Lumens	% Lamp	Luminaire
0-30	1115	N/A	27,9%
0-40	1835	N/A	45,9%
0-60	3245	N/A	81,1%
0-90	4000	N/A	100%

Reference www.cree.com/lighting for detailed photometric data

Application Reference

Open Space					
Spacing (m)	Lumens	Wattage	L/W	w/m ²	Actual Lux
2.4 x 2.4	2200L	22W	100	3,76	330
	4000L	44W	90	7,42	600
	4000L	36W	110	6,02	600
	5000L	50W	100	8,39	750
2.4 x 3.0	2200L	22W	100	3,01	275
	4000L	44W	90	5,91	500
	4000L	36W	110	4,84	500
	5000L	50W	100	6,67	635
3.0 x 3.0	2200L	22W	100	2,37	230
	4000L	44W	90	4,73	425
	4000L	36W	110	3,87	425
	5000L	50W	100	5,38	535
3.0 x 3.6	2200L	22W	100	2,04	185
	4000L	44W	90	3,98	340
	4000L	36W	110	3,23	340
	5000L	50W	100	4,52	425

3m ceiling: 80/50/20 refl ectances; 0.75m workplane, open room. LLF: 1.0 Initial
Open Space: 15m x 12m x 3m