

# KATLA BL

## Aluminium

Aluminium carrier for good thermal management

## IK08

Co-extruded polycarbonate housing

## Quick connection

Due to clippable end caps and PRACHT SLIDER

**HOUSING** Co-extruded polycarbonate, impact resistant, IK08.

**SEALS** Extremely short, ageing resistant silicone seals.

**ELECTRICAL COMPONENTS** High power LED, LED converter.

**THROUGH-WIRING** Including 3x1,5 mm<sup>2</sup> wiring ex works.

**ASSEMBLY** Variable mounting distances with PRACHT-CLIP-SYSTEM. Suitable for ceiling and rail mounting.

**FIELDS OF APPLICATION** Parking garages, basements, workshops, 1:1 fluorescent light exchange.

**CONFIGURABILITY** Possible in the KATLA PRO LINE. E.g.: light colors, control module, emergency lighting modules, REMADE and a lot more.


### Individual luminaire, color temperature 4000 K, R<sub>a</sub>>80, IP65

Power	Light distribution	Luminous flux	P/N	Length	Weight
1x20 W	120° wide	2800 lm	5231004B	1240 mm	1,1 kg
1x38 W	120° wide	5400 lm	5231014B	1240 mm	1,1 kg
1x27 W	120° wide	3800 lm	5231005B	1540 mm	1,2 kg
1x46 W	120° wide	6500 lm	5231015B	1540 mm	1,2 kg

Protection class I according to EN 60598

Protection type IP65

AC/DC 220-240 V 50/60 Hz

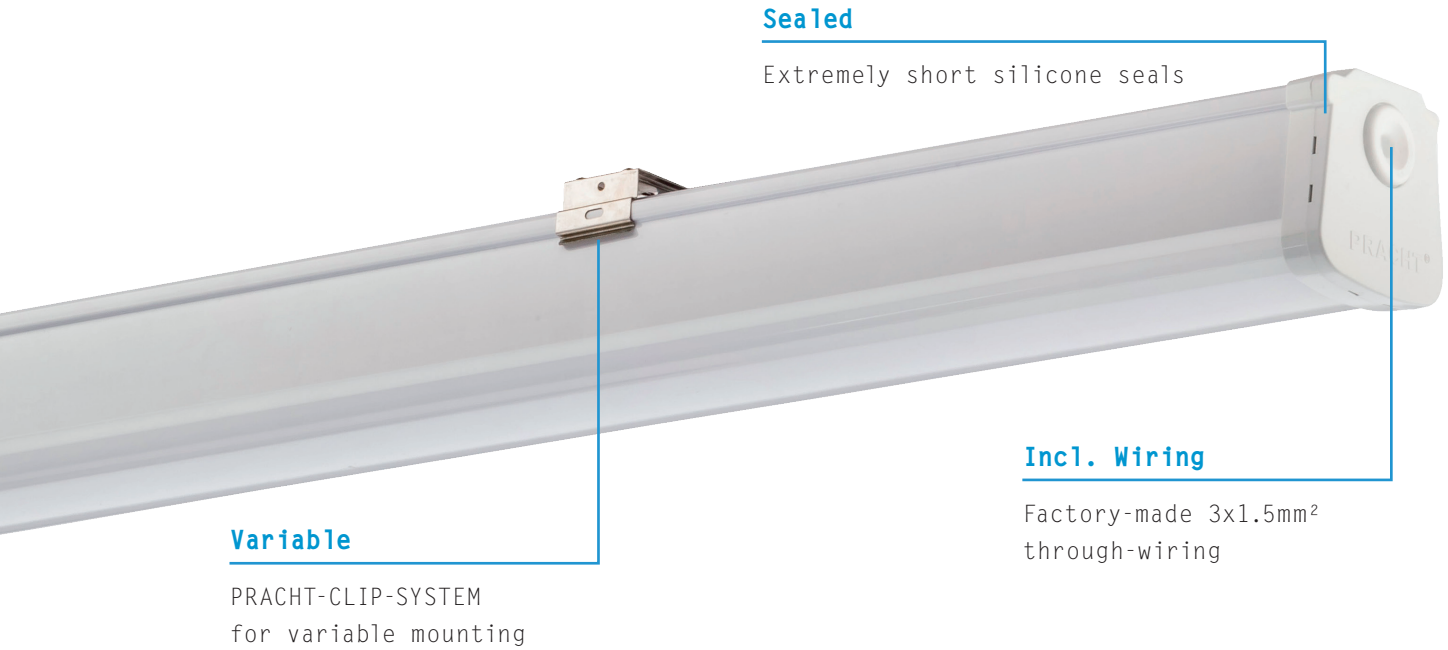

# MULTITALENT

**PRICE / PERFORMANCE SLIM**  
**SOLID PROFILE LIGHT**  
**EASY INSTALLATION HOMOGENEUS LIGHT**  
**1:1 REPLACEMENT ENEC**

**5**

**YEAR**  
**WARRANTY**



**50.000 h**  
**LIFETIME**

**IP67**  
**IP696K**



**INCL. TW**  
**(3X1,5MM²)**



**FROM -20°C**  
**TO +35°C**

THE RIGHT OF ERROR AND LATER TECHNICAL DEVELOPMENTS IS RESERVED - 05 05 2023