


TUBIS BL

TUBULAR LUMINAIRE

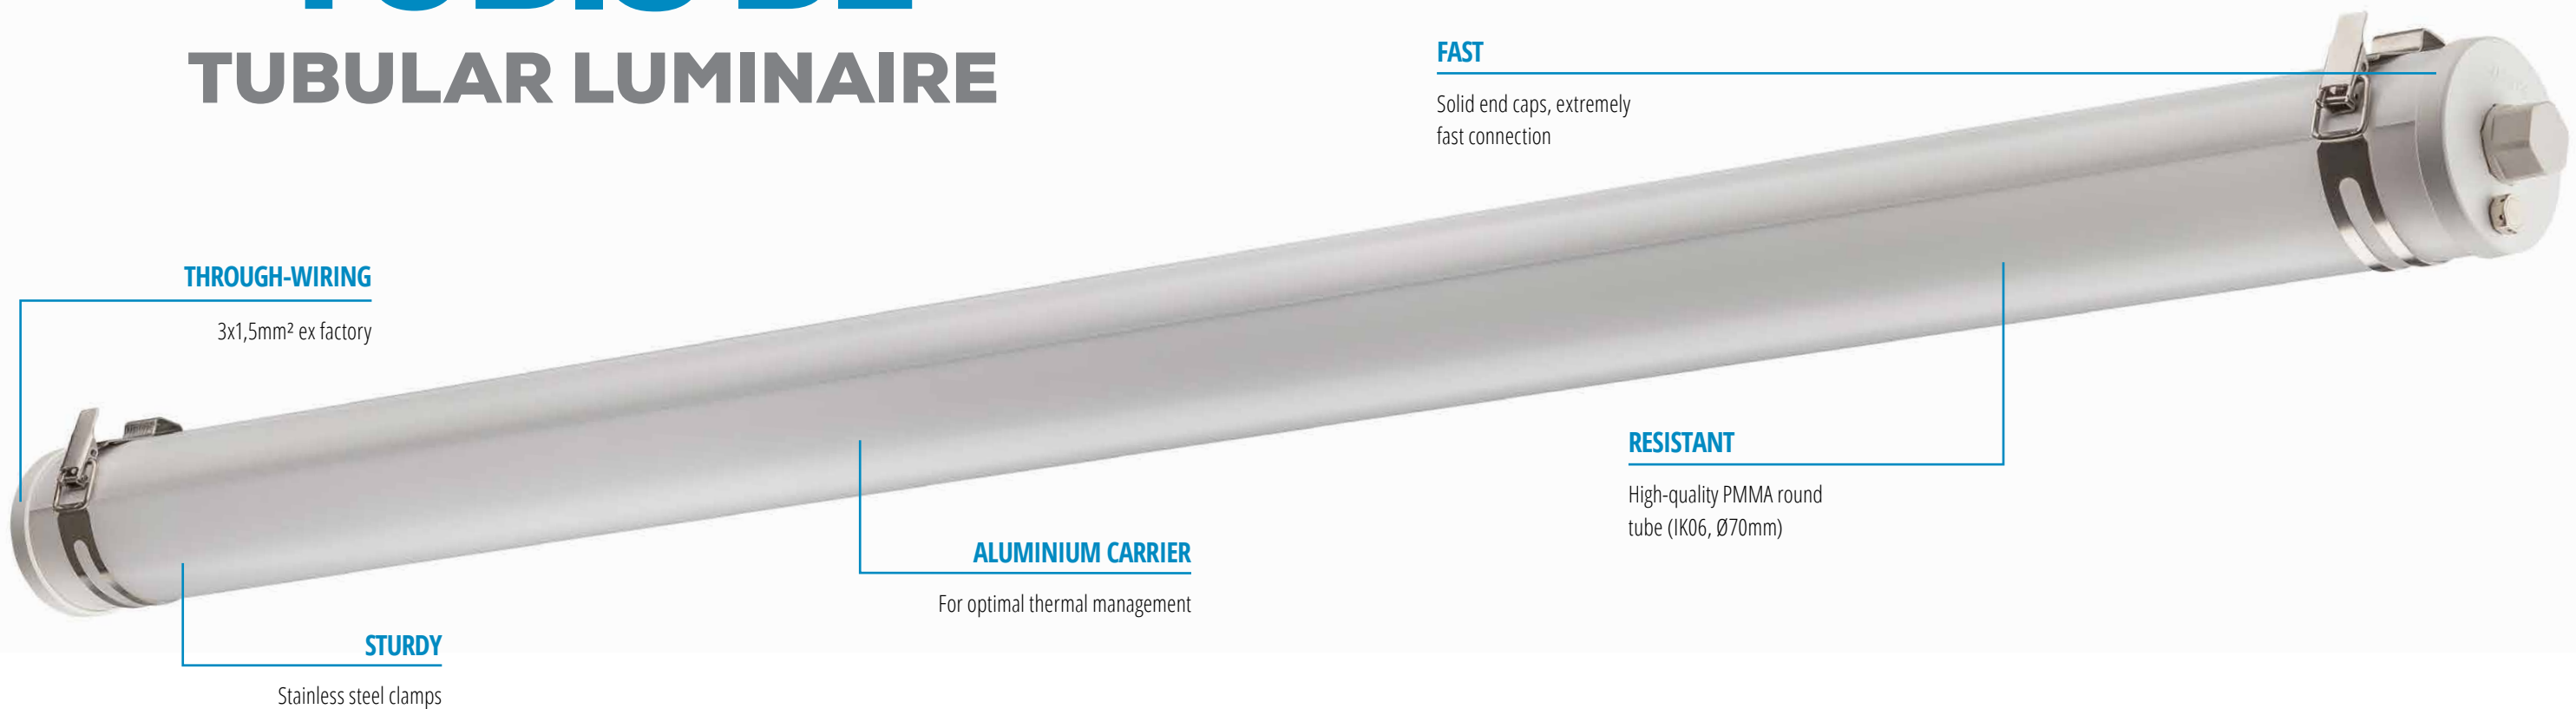

HOUSING Tube and end caps made of PMMA.

ELECTRICAL COMPONENTS High power LED, LED converter.

ASSEMBLY Variable mounting distances by PRACHT-CLAMP-SYSTEM. Suitable for ceiling, wall, pendant and rail mounting.

THROUGH-WIRING Including 3 x 1.5 mm² DV ex factory.

FIELDS OF APPLICATION Washing plants, wet rooms, workshops, unprotected outdoor areas, agriculture (unlimited), acid and alkaline cleaning, plants, oily environments and food industry.

- OIL-RESISTANT
- ACID-ALKALI RESISTANT
- UNPROTECTED OUTDOOR AREA
- AGRICULTURE
- ROBUST
- ENEC
- QUICK INSTALLATION
- -20° C ... +40° C

TUBIS BL

Individual luminaire, color temperature 4000 K, Ra>80, IP67, -20°C ... +40°C

Power	Light distribution	Luminous flux	P/N	Length
1x20 W	120° breit	2800 lm	5240024	1330 mm
1x36 W	120° breit	5400 lm	5240034	1330 mm
1x24 W	120° breit	3800 lm	5240025	1629 mm
1x42 W	120° breit	6500 lm	5240035	1629 mm

SPECIALIST

FROM EVERYDAY TO EXTREME - THE RIGHT SEGMENT FOR EVERY REQUIREMENT



Protection class I according to EN 60598
Protection type IP67/IP69K
AC/DC 220-240 V 50/60 Hz *registered