# **VENTURE LIGHTING 30W LED PANEL (DALI)**

# 600mm x 600mm

ORDER CODE: PNLA22-KITA2



# PHOTOMETRIC DATA

NOMINAL LUMENS: 3,600

COLOUR TEMPERATURE (K): 4,000

COLOUR RENDERING INDEX (CRI): 80+

BEAM ANGLE (°): 80

**UGR:** <19

LIGHT DISTRIBUTION: SYMMETRICAL

#### LIFE DATA

L70: 50,000 HOURS

# **ELECTRICAL DATA**

NOMINAL INPUT (W): 30

NOMINAL INPUT (V) ±10%: 220-240

NOMINAL VOLTAGE TYPE: AC

NOMINAL INPUT CURRENT (A): 0.14

NOMINAL POWER FACTOR: >0.95

NOMINAL THD (%): <10

NOMINAL INRUSH CURRENT: 5A FOR 50 MICROSECONDS

ELECTRICAL CLASS: II

CONNECTOR TYPE: FLY LEAD WITH PLUG

SHORT CIRCUIT PROTECTION: YES

OVERLOAD PROTECTION: YES

OVERHEATING PROTECTION: YES

DIMMABLE: DALI (NON-DIM ALSO AVAILABLE)

### PHYSICAL DATA

HOUSING COLOUR: WHITE

**LENGTH (MM):** 595

WIDTH (MM): 595

HEIGHT/DEPTH (MM): 10

WEIGHT (KG): 3.2

WARRANTY: 5 YEARS

LAMP TYPE: LED (NOT EXCHANGEABLE)

### **ENVIRONMENTAL DATA**

IP RATING: IP20

AMBIENT TEMPERATURE RANGE: -10°C / +40°C

### **MOUNTING OPTIONS**

RECESSED T-BAR MOUNT: YES

PENDANT / SUSPENSION MOUNT: YES\*

RECESSED PLASTER MOUNT: YES (CLIPS OR FRAME)\*

SURFACE MOUNT: YES\*

\*Additional accessories required. See Page 2 for details.



80<sub>+</sub> IP20



5 YEAR WARRANTY

COLOUR RENDERING



<19
UNIFIED GLARE RATING


INGRESS PROTECTION



120°



# **POLAR CURVE**



**Notes:** This Product Specification contains data about typical performance at nominal power. Actual values may depend on ballast and applications. Data is based upon tests performed by (or on behalf of) Venture Lighting in a controlled environment and is representative of relative performance at the relevant nominal power/voltage. Actual performance can vary depending on operating conditions.

Data is subject to change without notice. Images used for illustrative purposes only. Revision Date: 27/06/2023


# **VENTURE LIGHTING 30W LED PANEL (DALI)**

600mm x 600mm

ORDER CODE: PNLA22-KITA2



#### **ACCESSORIES**

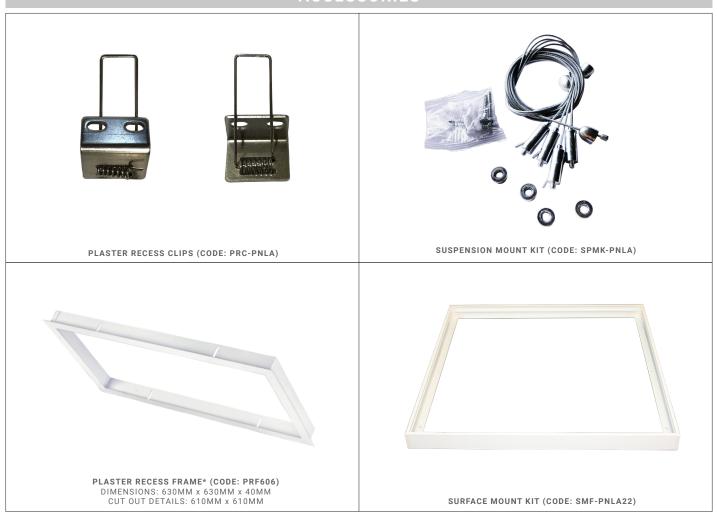

<sup>\*600</sup>mm x 600mm frame not pictured. Image for illustrative purposes only.